


OVERVIEW

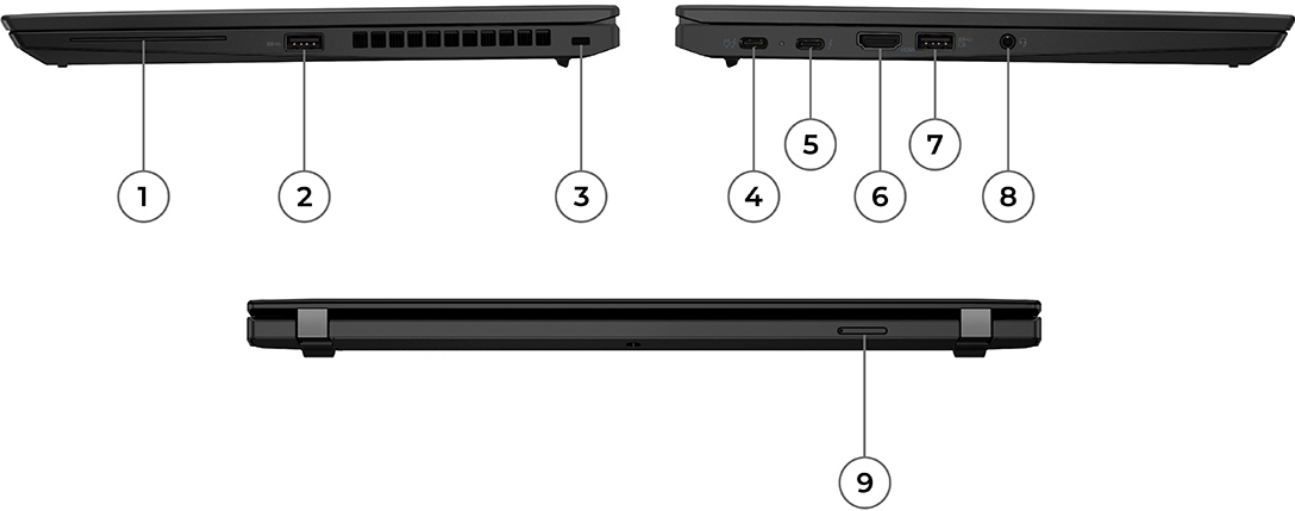

1. Smart card reader *	6. HDMI
2. USB 3.2 Gen 1	7. USB 3.2 Gen 1 (Always On)
3. Kensington Security Slot	8. Headphone / microphone combo jack (3.5mm)
4. Thunderbolt 4	9. Nano-SIM card slot *
5. Thunderbolt 4	

Notes:

- Items with * are only available on selected models

PERFORMANCE

Processor

Processor Family

12th Generation Intel® Core™ i3 / i5 / i7 Processor

Processor**[1]

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Memory Support	Processor Graphics
Core i3-1215U	6 (2 P-core + 4 E-core)	8	P-core 1.2GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	10MB	LPDDR5-5200	Intel UHD Graphics
Core i5-1235U	10 (2 P-core + 8 E-core)	12	P-core 1.3GHz / E-core 0.9GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	LPDDR5-5200	Intel Iris® Xe Graphics
Core i5-1245U	10 (2 P-core + 8 E-core)	12	P-core 1.6GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i7-1255U	10 (2 P-core + 8 E-core)	12	P-core 1.7GHz / E-core 1.2GHz	P-core 4.7GHz / E-core 3.5GHz	12MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i7-1265U	10 (2 P-core + 8 E-core)	12	P-core 1.8GHz / E-core 1.3GHz	P-core 4.8GHz / E-core 3.6GHz	12MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i5-1240P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i5-1250P	12 (4 P-core + 8 E-core)	16	P-core 1.7GHz / E-core 1.2GHz	P-core 4.4GHz / E-core 3.3GHz	12MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i7-1260P	12 (4 P-core + 8 E-core)	16	P-core 2.1GHz / E-core 1.5GHz	P-core 4.7GHz / E-core 3.4GHz	18MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i7-1270P	12 (4 P-core + 8 E-core)	16	P-core 2.2GHz / E-core 1.6GHz	P-core 4.8GHz / E-core 3.5GHz	18MB	LPDDR5-5200	Intel Iris Xe Graphics
Core i7-1280P	14 (6 P-core + 8 E-core)	20	P-core 1.8GHz / E-core 1.3GHz	P-core 4.8GHz / E-core 3.6GHz	24MB	LPDDR5-5200	Intel Iris Xe Graphics

Notes:

1. i3-1215U, i7-1255U, i7-1265U and i7-1280P are NOT available in EMEA.

Operating System

Operating System**[1]

- Windows® 11 Pro
- Windows 11 Home
- Windows 11 Home Single Language
- Windows 11 DG Windows 10 Pro 64
- Windows 10 IoT Enterprise LTSC 2021
- Linux
- Ubuntu Linux
- No operating system

Notes:

1. Some features may not be supported on the system with Linux preload, including but not limited to Intel RST RAID, MIPI computer vision camera, WWAN, Human Presence Detection, etc.

Graphics

Graphics**

Graphics	Type	Memory	Key Features
Intel UHD Graphics	Integrated	Shared	DirectX® 12.1
Intel Iris Xe Graphics	Integrated	Shared	DirectX 12.1

Monitor Support

Monitor Support†[1]

Supports up to 4 independent displays (native display and 3 external monitors via Thunderbolt™ and HDMI®)

- Thunderbolt supports up to 5K@60Hz
- HDMI supports up to 4K@60Hz

Notes:

1. Refresh rates >60hz also supported, however max resolution will be limited.

Chipset

Chipset

Intel SoC (System on Chip) platform

Memory

Max Memory^{[1][2]}

- 8GB soldered memory, not upgradable
- 16GB soldered memory, not upgradable
- 32GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots, dual-channel

Memory Type^[3]

LPDDR5-4800

Notes:

1. The max memory is based on the test results with current Lenovo® memory offerings. The system may support more memory as the technology develops.
2. In EMEA, 32GB memory is only available for i7 models.
3. Installed memory is actually 6400MHz but run at 4800MHz due to platform limitation

Storage

Storage Support^[1]

One drive, up to 2TB M.2 2280 SSD

Storage Slot

One M.2 2280 PCIe® 4.0 x4 slot

Storage Type^{**[2]}

Disk Type	Interface	Offering	Security
M.2 2280 SSD	PCIe NVMe®, PCIe x4	256GB / 512GB / 1TB	Opal 2.0
M.2 2280 SSD	PCIe NVMe, PCIe 4.0 x4 Performance	512GB / 1TB / 2TB	Opal 2.0

Notes:

1. The storage capacity supported is based on the test results with current Lenovo storage offerings. The system may support larger storage as the technology develops.
2. PCIe x4 SSD may be PCIe 3.0x4 or PCIe 4.0x4 as substitution.
2TB SSD is special bid only in EMEA.

Removable Storage

Card Reader

No card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2, Dolby® Audio™

Microphone

- Dual-microphone array, far-field, Dolby Voice
- No microphone

Camera^{**}

- HD 720p, with privacy shutter, fixed focus
- FHD 1080p, with privacy shutter, fixed focus
- FHD 1080p + IR hybrid, with privacy shutter, fixed focus
- No camera

Battery

Battery**

- Integrated Li-Polymer 41Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter
- Integrated Li-Polymer 54.7Wh battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Battery Life^[1]

Configuration 1 (max battery life)
MobileMark® 2018: up to 11.8 hr with 872 performance score @200nits
MobileMark 25: up to 9.7 hr with 618 performance score @250nits
JEITA 2.0: up to 19.8 hr @150nits
Local video playback: up to 15.7 hr @150nits

Alternate configuration 2
MobileMark 2018: up to 11.3 hr with 982 performance score @200nits
MobileMark 25: up to 9.7 hr with 791 performance score @250nits
JEITA 2.0: up to 19.5 hr @150nits
Local video playback: up to 15.2 hr @150nits

Alternate configuration 3
MobileMark 2018: up to 8.4 hr with 1243 performance score @200nits
MobileMark 25: up to 5.9 hr with 711 performance score @250nits
JEITA 2.0: up to 14.1 hr @150nits
Local video playback: up to 14 hr @150nits

Notes:

1. Configuration 1 (max battery life): WUXGA (non-touch), Intel i5-1240P, 8GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode
Alternate configuration 2: WUXGA (touch), Intel i5-1245U, 16GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode
Alternate configuration 3: WQXGA, Intel i7-1280U, 32GB LPDDR5, Win 11, 54.7Wh battery, best power efficiency power mode

All battery life claims are approximate maximum and based on results using [MobileMark 2018](#), [MobileMark 25](#), JEITA 2.0, continuous 1080p local video playback (using default Media Player in Fullscreen mode with 150nits brightness and default volume level), or Google Power Load Test (PLT) battery-life benchmark tests.
Actual battery life will vary and depends on many factors such as product configuration, software, wireless functionality, power management settings, and screen brightness.
The maximum capacity of the battery will decrease with time, ambient temperature and use.
Refer to [Microsoft® link](#) for more information about the Windows Performance power slider.

Power Adapter

Power Adapter**^{[1][2]}

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C slim (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

1. AC adapter offerings depend on the country.
2. No power adapter is for special bid only.

DESIGN

Display

Display**^{[1][2]}

Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)	Key Features
------	------------	-------	------	------------	---------	--------------	----------------	-------------	-------------------------	--------------

13.3"	WUXGA (1920x1200)	None	IPS	500 nits	Anti-glare	16:10	1000:1	72% NTSC	85°/85°/85°/85°	ThinkPad® Privacy Guard
13.3"	WUXGA (1920x1200)	Multi-touch	IPS	300 nits	Anti-glare	16:10	1000:1	72% NTSC	85°/85°/85°/85°	-
13.3"	WUXGA (1920x1200)	None	IPS	300 nits	Anti-glare	16:10	1000:1	72% NTSC	85°/85°/85°/85°	-
13.3"	WQXGA (2560x1600)	None	IPS	400 nits	Anti-glare	16:10	1200:1	100% sRGB	85°/85°/85°/85°	Low power, TÜV Low Blue Light, Dolby Vision™

Touchscreen

- On-cell touch, supports 10-point touch
- Non-touch

Notes:

1. California Electronic Waste Recycling Fee
In California, per state law, Lenovo charges an electronic waste recycling fee on this covered device at the time of sale of the product.
For more information, go to <https://www.calrecycle.ca.gov/Electronics/Consumer>
2. WQXGA display is NOT available in EMEA.

Input Device

Keyboard

6-row, spill-resistant, multimedia Fn keys with Unified Communications controls

Keyboard Backlight^[1]

- LED backlight
- Non-backlight

UltraNav™

TrackPoint® pointing device and glass-like Mylar® surface multi-touch touchpad, 61 x 115 mm (2.40 x 4.53 inches)

Notes:

1. Storm grey cover is ONLY available with backlit keyboard.

Mechanical

Dimensions (WxDxH)^[1]

Models	Dimensions
Models with CF /GF hybrid top cover	305.8 x 217.89 x 18.25 mm (12.04 x 8.58 x 0.72 inches)
Models with PPS top cover	305.8 x 217.56 x 18.10 mm (12.04 x 8.57 x 0.71 inches)
Models with aluminium top cover	305.8 x 218.39 x 18.10 mm (12.04 x 8.60 x 0.71 inches)

Weight^[2]

Models	Weight
Models with WUXGA display, 41Wh battery, and storm grey top cover	Starting at 1.28 kg (2.83 lbs)
Models with WQXGA display, 41Wh battery, and black PPS top cover	Starting at 1.23 kg (2.71 lbs)
Models with WUXGA display, 54.7Wh battery, and storm grey top cover	Starting at 1.32 kg (2.91 lbs)
Models with WUXGA display, 54.7Wh battery, and black carbon fiber top cover	Starting at 1.24 kg (2.74 lbs)
Models with WUXGA display, 54.7Wh battery, and black PPS top cover	Starting at 1.29 kg (2.85 lbs)
Models with WUXGA display, 41Wh battery, and black carbon fiber top cover	Starting at 1.20 kg (2.65 lbs)
Models with WQXGA display, 54.7Wh battery, and black PPS top cover	Starting at 1.26 kg (2.78 lbs)
Models with WUXGA display, 41Wh battery, and black PPS top cover	Starting at 1.25 kg (2.77 lbs)

Case Color^{**[3]}

- Storm grey
- Thunder black

Case Material^{**}

- Thunder black models: carbon fiber hybrid or PPS (top), aluminium (bottom)
- Storm grey models: aluminium (top), aluminium (bottom)

Notes:

1. The system dimensions may vary depending on configurations.
2. The system weight is approximate and based on results in Lenovo lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight for each specific model.
3. Storm grey case is NOT available in EMEA.

CONNECTIVITY

Network

Ethernet^[1]

No onboard Ethernet

WLAN + Bluetooth®^{[2][3]}

Intel Wi-Fi® 6E AX211, 802.11ax 2x2 Wi-Fi + Bluetooth 5.1

WWAN**

- Wireless WAN upgradable to 4G (with antenna ready)
- Fibocom FM350-GL, 5G Sub-6 GHz, M.2 Card, with embedded eSIM functionality
- Fibocom L860-GL-16, 4G LTE CAT16, M.2 card
- Quectel EM05-G, 4G LTE CAT4, M.2 card
- No support

SIM Card

- Gemalto eSIM card (physical)
- No SIM card inbox

NFC

- Near Field Communication
- No support

Notes:

1. Ethernet support via optional Lenovo USB-C to Ethernet Adapter
2. Bluetooth 5.2 is hardware ready but may run at a lower version due to OS limitations.
3. Wi-Fi 6E full features might be limited by country level restrictions.
Wi-Fi 6E only enabled on Windows 11 and operates as Wi-Fi 6 with Windows 10.
6GHz Wi-Fi 6E operation is dependent on the support of the operating system, routers/APs/Gateways that support Wi-Fi 6E, and the regional regulatory certifications & spectrum allocation.

Ports^[1]

Standard Ports

- 2x Thunderbolt 4 / USB4® 40Gbps (support data transfer, Power Delivery 3.0 and DisplayPort™ 2.0)
- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x HDMI, up to 4K/60Hz
- 1x Headphone / microphone combo jack (3.5mm)

Optional Ports***

- 1x Smart card reader
- 1x Nano-SIM card slot (WWAN support models)

Notes:

1. The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.
USB 2.0: 480 Mbit/s;
USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;
USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;
USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;
Thunderbolt 3/4: 40 Gbit/s

Docking

Docking

Various docking solutions supported via Thunderbolt / USB-C.

For more compatible docking solutions, please visit [Docking for ThinkPad X13 Gen 3 \(Intel\)](#)

Monitor Cable

Monitor Cable***

- Lenovo HDMI to VGA Monitor Adapter
- Lenovo USB-C to VGA Adapter
- Lenovo USB-C to DisplayPort Adapter
- No monitor cable

SECURITY & PRIVACY

Security

Security Chip

Discrete TPM 2.0, TCG certified

Physical Locks

Kensington® Nano Security Slot™, 2.5 x 6 mm

Smart Card Reader

- Smart card reader
- No smart card reader

Fingerprint Reader

- Touch style fingerprint reader integrated in power button, match-on-chip
- No fingerprint reader

BIOS Security

- Power-on password
- Supervisor password
- System management password
- NVMe password
- FIDO (Fast Identity Online) authentication
- Certificate based BIOS authentication
- Firmware Resiliency 3.0

Other Security

- (Optional) Camera privacy shutter
- (Optional) IR camera for Windows Hello
- (Optional) Privacy Guard with Privacy Alert
- Glance by Mirametrix®
- (Optional) Human Presence Detection
- Tile ready

MANAGEABILITY

System Management

System Management**[]

- Intel vPro® Enterprise
- Intel vPro Essentials
- Non-vPro

Notes:

1. Intel vPro offers a superset of DASH's defined capabilities.

SERVICE

Warranty

Base Warranty**

- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 1-year limited onsite service

- 3-year (1-yr battery) courier or carry-in service
- 3-year (1-yr battery) limited onsite service
- No base warranty

ENVIRONMENTAL

Sustainability

Material

97% PCC recycled plastic used in speaker enclosure
25% PCC recycled plastic used in the 54.7Wh battery
95% PCC recycled plastic used in standard 65W adapter
Low-temperature solder
90% recycled and/or sustainable packaging

Operating Environment

Temperature^[1]

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage and transportation in original shipping package: -20°C (-4°F) to 60°C (140°F)
- Storage without package: 5°C (41°F) to 43°C (109°F)

Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage and transportation: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

1. When you charge the battery, its temperature must be no lower than 10°C (50°F).

ACCESSORIES

Bundled Accessories

Bundled Accessories

- Lenovo USB-C to Ethernet Adapter
- None

CERTIFICATIONS

Green Certifications^[1]

Green Certifications^[2]

- EPEAT™ Gold
- ENERGY STAR® 8.0
- ErP Lot 3
- TCO Certified 9.0
- RoHS compliant

Notes:

1. The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration.
2. EPEAT is registered where applicable, please see <https://www.epeat.net> for registration status by country.

Other Certifications

Mil-Spec Test

MIL-STD-810H military test passed

Other Certifications

- (Optional) Intel Evo™ Platform
- (Optional) TÜV Rheinland® Low Blue Light

- Feature with ** means that only one offering listed under the feature is configured on selected models.
- Feature with *** means that one or more offerings listed under the feature could be configured on selected models.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



intel



intel



intel



intel



intel



intel